

Realization of Probabilistic Identification and Clone of Quantum-States II Multiparticles System

Chuan-Wei Zhang, Chuan-Feng Li, Guang-Can Guo*

Department of Physics and Laboratory of Quantum Communication and Quantum

Computation,

University of Science and Technology of China,

Hefei 230026, P. R. China

We realize the probabilistic cloning and identifying linear independent quantum states of multi-particles system, given prior probability, with universal quantum logic gates using the method of unitary representation. Our result is universal for separate state and entanglement. We also provide the realization in the condition given M initial copies for each state.

PACS numbers: 03.67.-a, 03.65.Bz, 89.70.+c

*Email: gcguo@ustc.edu.cn

I. BACKGROUND

The development of quantum information theory [1] has drawn attention to fundamental questions about what is physically possible and what is not. An example is the quantum no-cloning theorem [2,3], which asserts that unknown pure states can not be reproduced or copied by any physical means. Wootters and Zurek [2] shows that the cloning machines violates the quantum superposition principles, which applies to a minimum total number of three states, and hence does not rule out the possibility of cloning two non-orthogonal states. Yuen and D'Ariano [4,5] show that a violation of unitarity makes the cloning of two non-orthogonal states impossible. Recently, Barnum et al. [6] have extended such results to the case of mixed states, and it was shown that two non-commuting mixed states can not be broadcast onto two separate quantum systems, even when the states need only be reproduced marginally. More recently, Koashi and Imoto [7] extended the standard no-cloning theorem to the case of a subsystem correlated to others and derive a necessary and sufficient condition for two pure states, each entangled in two remote systems, to be clonable by the sequential access to the two systems. Identification and clone have close relation and also we can not identify an arbitrary unknown state. Since quantum states can not be cloned and identified faithfully, recently, the inaccurate coping and discriminating of quantum states have aroused great interest.

The inaccurate coping and discriminating of quantum states can be divided into two main categories: universal and state-dependent. The first category is aimed at the approximate clone or identification of an arbitrary state [8-13], of which the figuration of merit is the local fidelity. The second category is designed to identify and clone only a finite number of states and here we can identify two

sub-categories. Approximate state-dependent cloning machines deterministically generate approximate clones of state belonging to a finite set [14-16]. Exact state-dependent cloning machines clone a set of non-orthogonal but linear-independent pure states with the limited success probability [17-20]. This job is done by Duan and Guo and they have found the maximum success probability if these copies are required to be exact clones. Duan and Guo have provided a new possibility to copy states and demonstrated that these clones can get to the maximum success probability which is non-zero. More recently, we [21] constructed general discriminating strategies of the quantum states secretly chosen from a certain set, given initial M copies of each state, and obtained the matrix inequality, which describe the bound between the maximum probability of correctly determining and that of error. We [22] also obtained the unitary representations and Hamiltonians for the most general quantum probabilistic clone and identification of n linear independent states with the given probability. For application we realized it in 2-state system with universal quantum logic gates under the condition that the maximum probability is chosen.

In this paper we will apply our method, which was provided in [22], and realize the probabilistic cloning and identifying linear independent quantum states of multi-particles system with universal logic gates. Entanglement is a special state of multi-particles system, so we realize the probabilistic clone and identification of entanglement states in actual. In Section II, we will introduce our method in [22] and some results about universal logic gates. In Section III, we execute this method on 2-particles system and realize the probabilistic cloning and identifying four linear independent states of two particles. It is obvious that entangled states of two particles are only special cases of our result. We generalize our result to n -particles system and we also provide the realization of the probabilistic clone and identification if we give M initial copies for each state.

II. INTRODUCTION

We begin our work by introducing the result in [22], which is also the basis method used in this article. Consider the question of probabilistic identification if we have M initial copies of each state. We are concerned with a set of n linear-independent quantum states $\{|\psi_i\rangle, i = 1, 2, \dots, n\}$, which span an n -dimensional Hilbert space $\mathcal{H}$. We use a general unitary-reduction operation and get

$$\hat{U} |\psi_i\rangle^{\otimes M} |P_0\rangle = \sqrt{\gamma_i} |\widetilde{\varphi}_i\rangle |P_1\rangle + \sum_j c_{ij} |\alpha_j\rangle |P_0\rangle, \quad (2.1)$$

where γ_i is the probability of success, $|\psi_i\rangle^{\otimes M} = |\psi_i\rangle_1 |\psi_i\rangle_2 \cdots |\psi_i\rangle_M$, $|\psi_i\rangle_k$ is the k -th copy of state $|\psi_i\rangle$. For $|\psi_i\rangle^{\otimes M}$ are linear-independent, they span a n -dimensional Hilbert space. We denote $\{|\alpha_j\rangle, j = 1, 2, \dots, n\}$ as the orthogonal basis states of that space. $\{|\widetilde{\varphi}_i\rangle, i = 1, 2, \dots, n\}$ is a set of orthogonal states in n^M -dimensional Hilbert space, whose orthogonal basis states are $\{|\varphi_{i_1}\rangle_1 |\varphi_{i_2}\rangle_2 \cdots |\varphi_{i_M}\rangle_M, i_j = 1, 2, \dots, n, j = 1, 2, \dots, M\}$, where $\{|\varphi_i\rangle, i = 1, 2, \dots, n\}$ are the orthogonal basis states of $\mathcal{H}$. $\{|P_0\rangle, |P_1\rangle\}$ are orthogonal basis states of the probe system.

The unitary evolution $\hat{U}$ exists if and only if

$$X^{(M)} = \Gamma + CC^+, \quad (2.2)$$

where $X^{(M)} = [\langle\psi_i | \psi_j\rangle^M]$, $\Gamma = \text{diag}(\gamma_1, \gamma_2, \dots, \gamma_n)$, $C = [c_{ij}]_{n \times n}$.

Equation (2.2) is equivalent to the following inequality

$$X^{(M)} - \Gamma \geq 0. \quad (2.3)$$

Inequality (2.3) determines maximum probability of success.

We choose the probability matrix Γ and give a set of parameters that are determined by

$$I - C^+ X^{(M)-1} C = V \text{diag}(m_1, m_2, \dots, m_n) V^+. \quad (2.4)$$

In the condition of Eq. (2.4) and the orthogonal basis states $\{|\alpha_i\rangle|P_0\rangle\}, \{|\widetilde{\varphi}_i\rangle|P_1\rangle\}, i = 1, 2, \dots, n\}$, we can represent U as

$$U = \tilde{V} \begin{pmatrix} F & -E \\ E & F \end{pmatrix} \tilde{V}^+, \quad (2.5)$$

where $E = \text{diag}(\sqrt{m_1}, \sqrt{m_2}, \dots, \sqrt{m_n})$, $F = \text{diag}(\sqrt{1-m_1}, \sqrt{1-m_2}, \dots, \sqrt{1-m_n})$, $\tilde{V} = \text{diag}(V, V)$.

Now we shall be concerned with clone in the circumvent that if we have M initial copies and wish to obtain N copies, where $N > M$. We use the unitary evolution as following

$$U |\psi_i\rangle^{\otimes M} |\varphi_1\rangle^{\otimes(N-M)} |P_0\rangle = \sqrt{\gamma_i} |\psi_i\rangle^{\otimes N} |P_i\rangle + \sum_j c_{ij} |\alpha_j\rangle |\varphi_1\rangle^{\otimes(N-M)} |P_0\rangle, \quad (2.6)$$

where $|P_0\rangle$ and $|P_i\rangle$ are normalized states of the probe system(not generally orthogonal) but $|P_0\rangle$ is orthogonal with each of $|P_i\rangle$. The using of $|\psi_i\rangle^{\otimes N}$ has the similar definition with $|\psi_i\rangle^{\otimes M}$ and the basis states of space $\{|\psi_i\rangle^{\otimes N} |P_i\rangle, i = 1, \dots, n\}$ are $\{|\beta_j\rangle, j = 1, 2, \dots, n\}$.

U exists if and only if

$$X^{(M)} = \sqrt{\Gamma} X_P^{(N)} \sqrt{\Gamma} + CC^+, \quad (2.7)$$

where $X_P^{(N)} = [\langle\psi_i|\psi_j\rangle^N \langle P_i|P_j\rangle]$.

Eq. (2.7) is equivalent to the following

$$X^{(M)} - \sqrt{\Gamma} X_P^{(N)} \sqrt{\Gamma} \geq 0. \quad (2.8)$$

Given probability matrix Γ , under the condition (2.4) but the different orthogonal basis vectors $\{|\alpha_i\rangle|\varphi_1\rangle^{\otimes(N-M)}|P_0\rangle, i = 1, 2, \dots, n\}, \{|\beta_i\rangle, i = 1, 2, \dots, n\}$, we represent U as the same form as that in Eq.(2.5).

With the concrete form of the unitary representation of the evolution in cloning machine, we can realize that probabilistic clone and identification with universal quantum logic gates, for Deutsch [23] have proved that any unitary evolution

could be executed with universal quantum logic gates, i.e. $\Lambda_m(U)$. A. Barenco et al. [24] has demonstrated that any arbitrary $\Lambda_m(U)$ could be realized by the combination of a set of gates of all one-bit quantum gates $[U(2)]$ and the two-bit Control-NOT gate(that maps Boolean values (x, y) to $(x, x \oplus y)$). So our work is to realize our result with gate $\Lambda_m(U)$.

In the following part of this section we will introduce some basis ideas and notation about universal quantum logic gates. For any unitary matrix $U = \begin{pmatrix} u_{00} & u_{01} \\ u_{10} & u_{11} \end{pmatrix}$ and $m \in \{0, 1, 2, \dots\}$, the matrix corresponding to the $(m+1)$ -bit operator $\Lambda_m(U)$ is $\text{diag}(I_{2^m}, U)$, where the basis states are lexicographically ordered, i.e., $|000\rangle, |001\rangle, \dots, |111\rangle$.

When $U = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$, $\Lambda_m(U)$ is so called Toffoli gate [23] with $m+1$ input bits. For a general U , $\Lambda_m(U)$ can be regarded as a generalization of the Toffoli gate, which, on the $m+1$ input bits, applies U to the $(m+1)$ -th bit if and only if the other m bits all are on 1.

III. REALIZATION FOR MULTI-PARTICLES SYSTEM

We begin our discussion with introducing two lemma which tell us how to decompose a general unitary matrix to the products of the matrixes of the form $\Lambda_m(U)$.

LEMMA 1: Any unitary matrix $U = [u_{ij}]_{n \times n}$ can be decomposed into the following form

$$U = \left(\prod_{t=1}^{n-1} \prod_{l=t+1}^n A_{tl} \right) \left(\prod_{k=1}^n B_k \right), \quad (3.1)$$

where $A_{tl} = [a_{ij}^{(tl)}]_{n \times n} = P_{t,n-1} P_{l,n} \hat{A}(\hat{u}_{tl}) P_{l,n}^+ P_{t,n-1}^+$, P_{ij} is the unitary matrix which interchange between the i -th row and j -th row of $\hat{A}(\hat{u}_{tl})$ and P_{ij}^+ interchange the i -th collum and j -th collum of $\hat{A}(\hat{u}_{tl})$. It is obvious that $P_{ij} = P_{ij}^+$. $\hat{A}(\hat{u}_{tl}) =$

$\text{diag}(1, 1, \dots, 1, \hat{u}_{tl})$, where $\hat{u}_{tl}$ is a 2×2 unitary matrix. $B_k = P_{k,n} \hat{B}(\exp(i\alpha_k)) P_{k,n}$, where $\hat{B}(\exp(i\alpha_k)) = \text{diag}(1, 1, \dots, 1, \exp(i\alpha_k))$.

The meaning of this decomposition in math is that we use some unitary matrix to transfer the non-diagonal elements of U into 0. the decomposition is stylized and can be easily finished by any classical computer. A_{tl} and B_k are completely determined by U . When $n = 2^{m+1}$, we find $\hat{A}(\hat{u}_{tl}) = \Lambda_m(\hat{u}_{tl})$, $\hat{B}(\exp(i\alpha_k)) = \Lambda_m(\text{diag}(1, \exp(i\alpha_k)))$. We suppose in the subspace which is spanned by basis states $|x_1^i, x_2^i, \dots, x_{m+1}^i\rangle$ and $|x_1^j, x_2^j, \dots, x_{m+1}^j\rangle$, for all $x_k^i, x_k^j \in \{0, 1\}$, $k = 1, 2, \dots, m+1$. When $i \neq j$, there must exist k making $x_k^i \neq x_k^j$. Denote the minimum value of k still as k , we generally assume $x_k^i = 1$, then $x_k^j = 0$. For $k < s \leq n$, if $x_s^i \neq x_s^j$, we execute the k -th bit control σ_x^s operation on the s -th bit (C-NOT gate). Then for $1 \leq h \leq n$, when $h \neq k$ and $x_h^i = x_h^j = 0$, we execute σ_x^h on the s -th bit. At last we interchange the input sequence of the k -th bit and the $(m+1)$ -th bit. With all the above operations, we transfer the operation P_{ij} into $\Lambda_m(\sigma_x)$.

With above lemma, we can express a unitary evolution as the products of some controlled unitary operations.

In this section we first limit our discussion in two particles, which is four states system, and suppose $M = 1$, $N = 2$. For general n particles and M, N , we will discuss that in the last part. The realization of probabilistic clone and identification for two particles system has important value in practice, for the entanglement of two particles is a special state of two particles system. We assume each particle reduce to either of two states $|0\rangle$ or $|1\rangle$ after we execute measurement σ_z on them. So the states of the two particles span a 4-dimension Hilbert space $\mathcal{H}$, whose orthogonal basis states are $\{|\phi_1\rangle_{1,2} = |00\rangle_{1,2}, |\phi_2\rangle_{1,2} = |01\rangle_{1,2}, |\phi_3\rangle_{1,2} = |10\rangle_{1,2}, |\phi_4\rangle_{1,2} = |11\rangle_{1,2}\}$. Consider four linear independent quantum states $\{|\psi_i\rangle_{1,2}, i = 1, 2, 3, 4\}$. We express each

state on the above basis states as

$$|\psi_i\rangle_{1,2} = \sum_j t_{ij} |\phi_j\rangle_{1,2}, \quad (3.3)$$

where t_{ij} satisfy $\sum_j |t_{ij}|^2 = 1$. Define $T = [t_{ij}]_{4 \times 4}$. The determinant of T should be non-zero because $|\psi_i\rangle_{1,2}$ are linear independent. Contrast with the situation of 3-dimension, we give following lemma

LEMMA 2: For any four states $\{|\psi_i\rangle_{1,2}, i = 1, 2, 3, 4\}$ in Hilbert space $\mathcal{H}$, there exist a unitary operator U_0 to make

$$U_0 \left(|\psi_1\rangle_{1,2}, |\psi_2\rangle_{1,2}, |\psi_3\rangle_{1,2}, |\psi_4\rangle_{1,2} \right) = \left(|\phi_1\rangle_{1,2}, |\phi_2\rangle_{1,2}, |\phi_3\rangle_{1,2}, |\phi_4\rangle_{1,2} \right) \tilde{T}, \quad (3.4)$$

$$\text{where } \tilde{T} = \begin{pmatrix} 1 & e^{i\mu_2^1} \cos \theta_2^{(1)} & e^{i\mu_3^1} \cos \theta_3^{(1)} \cos \theta_3^{(2)} & e^{i\mu_4^1} \cos \theta_4^{(1)} \cos \theta_4^{(2)} \cos \theta_4^{(3)} \\ 0 & \sin \theta_2^{(1)} & e^{i\mu_3^2} \cos \theta_3^{(1)} \sin \theta_3^{(2)} & e^{i\mu_4^2} \cos \theta_4^{(1)} \cos \theta_4^{(2)} \sin \theta_4^{(3)} \\ 0 & 0 & \sin \theta_3^{(1)} & e^{i\mu_4^3} \cos \theta_4^{(1)} \sin \theta_4^{(2)} \\ 0 & 0 & 0 & \sin \theta_4^{(1)} \end{pmatrix} \text{ and}$$

$0 \leq \theta_i^{(1)} < \pi, 0 \leq \theta_i^{(j)} < 2\pi, 0 \leq \mu_i^j < 2\pi$, if $\{|\psi_i\rangle_{1,2}, i = 1, 2, 3, 4\}$ are linear independent, there must be $\theta_i^{(1)} > 0$. $\tilde{T}$ is determined by

$$T^+ T = \tilde{T}^+ \tilde{T}. \quad (3.5)$$

So in the following we only consider the probabilistic clone and identification of states with the form as $|\tilde{\psi}_i\rangle_{1,2} = U_0 |\psi_i\rangle_{1,2}$. With *LEMMA 1* we can decompose U_0 to basis operation.

A. Realization of Probabilistic Identification

Given a set of linear independent quantum states of two particles system $\{|\tilde{\psi}_i\rangle_{1,2}, i = 1, 2, 3, 4\}$, which have the forms we have introduced above. We use a general unitary-reduction operation as that in Eq.(2.1) to execute the probabilistic identification, where we let $M = 1$. The maximum identification probability is determined by Ineq.(2.3). Denote $|\alpha_i\rangle = |\phi_i\rangle$ and $|\tilde{\varphi}_i\rangle = |\phi_i\rangle$.

On the given prior maximum probability matrix Γ and orthogonal basis states $\left\{ \left\{ |\phi_i\rangle_{1,2} |P_0\rangle, i = 1, 2, 3, 4 \right\}, \left\{ |\phi_j\rangle_{1,2} |P_1\rangle, j = 1, 2, 3, 4 \right\} \right\}$, U can be determined by Eq.(2.5), where $\tilde{V}$, F , E are determined by Eq.(2.4). $\tilde{V}$ represent the operate $\hat{V}_{1,2}\hat{I}_P$, where the matrix corresponding to the operator $\hat{V}_{1,2}$ on the basis states $\left\{ |\phi_i\rangle_{1,2} \right\}$ is V , $\hat{I}_P$ represent unity operator of probe system. On new orthogonal basis states $\left\{ \left\{ |\phi_i\rangle_{1,2} |P_0\rangle, |\phi_i\rangle_{1,2} |P_1\rangle \right\}, i = 1, 2, 3, 4 \right\}$, we express $S = \begin{pmatrix} F & -E \\ E & F \end{pmatrix}$ as $S = \text{diag}(K_1, K_2, K_3, K_4)$, where $K_i = \begin{pmatrix} \sqrt{1-m_i} & -\sqrt{m_i} \\ \sqrt{m_i} & \sqrt{1-m_i} \end{pmatrix}$. So we obtain

$$\hat{S} = \sigma_x^1 \sigma_x^2 \Lambda_2(K_1) \sigma_x^2 \sigma_x^1 \cdot \sigma_x^1 \Lambda_2(K_2) \sigma_x^1 \cdot \sigma_x^2 \Lambda_2(K_3) \sigma_x^2 \cdot \Lambda_2(K_4). \quad (3.6)$$

We have showed in *LEMMA 1* that the unitary evolution U_0 and $\hat{V}_{1,2}$ can be decomposed into the product of basis operations such as C-NOT and $\Lambda_2(\hat{u})$. The decomposition of $\Lambda_2(\hat{u})$ has been completed by Barenco et al. [24]. For C-NOT gate we adopt the schematic convention of Barenco et al. [24] by representing the transformations of the target and control qubits by $\oplus$ and $\bullet$ respectively. So we print the realization of quantum gates here

Figure 1.The networks of probabilistic identification.

where the S-gate is illustrated in Fig. 2

Figure 2.The S-gate realization.

B. Realization of Probabilistic Clone

We still use a general unitary-reduction operation as that in Eq. (2.6) to execute the probabilistic clone, where we let $M = 1$, $N = 2$. The maximum clone probability is determined by Ineq.(2.8), where we let $\{|P_i\rangle = |P_1\rangle, i = 2, 3, 4\}$. We denote A represent the system of the two particles 1, 2 and B for 1', 2'. To

obtain the basis states $|\beta_j\rangle$, we first introduce a new operation which transfer all of the information describing state $|\tilde{\psi}_i\rangle^{\otimes N}$ the N clone are in into one state of two particles. This operation must itself be performed using only pairwise and local interactions. Denote vector $\theta = \{\theta_i^{(j)}, \mu_i^j, 2 \leq i \leq 4, 1 \leq j \leq i-1\}$, ξ, η are denoted as same. This operation acts as follows:

$$D(\theta, \xi) |\tilde{\psi}_i(\theta)\rangle_A |\tilde{\psi}_i(\xi)\rangle_B = |\tilde{\psi}_i(\eta)\rangle_A |00\rangle_B. \quad (3.7)$$

The operator $D(\theta, \xi)$ is unitary, so we must have

$$X(\theta, \xi) = \tilde{T}^+(\eta) \tilde{T}(\eta), \quad (3.8)$$

where $X(\theta, \xi) = [{}_A \langle \tilde{\psi}_i(\theta) | {}_B \langle \tilde{\psi}_i(\xi) | | \tilde{\psi}_j(\theta) \rangle_A | \tilde{\psi}_j(\xi) \rangle_B]_{4 \times 4}$. For the special form of $|\tilde{\psi}_i\rangle$, together with $0 < \theta_i^{(1)} < \pi$, $0 \leq \theta_i^{(j)} < 2\pi$, $0 \leq \mu_i^j < 2\pi$, suffices to determine η uniquely through Eq.(3.8).

To obtain an explicit expression for the operator $D(\theta, \xi)$, we must first specify how it transforms states in the subspace orthogonal to that spanned by $|\tilde{\psi}_i(\theta)\rangle_A |\tilde{\psi}_i(\xi)\rangle_B$. A natural completion of the description of $D(\theta, \xi)$ suggests itself if we take the sum and difference of the four equation in Eq.(3.7), giving

$$D^{-1}(\theta, \xi) \{|\phi_i\rangle_A |00\rangle_B, i = 1, 2, 3, 4\} = \{|\phi_i\rangle_A |\phi_j\rangle_B, i, j = 1, 2, 3, 4\} G\tilde{T}^{-1}(\eta), \quad (3.9)$$

where $G_{16 \times 4}$ is the matrix representation of states $\{|\tilde{\psi}_i(\theta)\rangle_A |\tilde{\psi}_i(\xi)\rangle_B, i = 1, 2, 3, 4\}$ on the basis states $\{|\phi_i\rangle_A |\phi_j\rangle_B, i, j = 1, 2, 3, 4\}$, which are lexicographically ordered, i.e., $|0000\rangle, |0001\rangle, \dots, |1111\rangle$, of Hilbert space $\mathcal{H} \otimes \mathcal{H}$. We denote $G\tilde{T}^{-1}(\eta) = (\omega_1, \omega_5, \omega_9, \omega_{13})$. It is obvious that the states $|\omega_i\rangle$ that ω_i represent are orthogonal and in the space spanned by $\{|\tilde{\psi}_i(\theta)\rangle_A |\tilde{\psi}_i(\xi)\rangle_B, i = 1, 2, 3, 4\}$. So we can choose states $\{|\omega_j\rangle, 1 \leq j \leq 16, j \notin \{1, 5, 9, 13\}\}$ in the subspace orthogonal to that spanned by $\{|\omega_i\rangle, i = 1, 5, 9, 13\}$ and denote $\tilde{G}^{-1} = (\omega_1, \omega_2, \dots, \omega_{16})$. With Eq.(3.9), we let

$$D^{-1}(\theta, \xi) \{|\phi_i\rangle_A |\phi_j\rangle_B\} = \{|\phi_i\rangle_A |\phi_j\rangle_B\} \tilde{G}^{-1}. \quad (3.10)$$

So we represent $D(\theta, \xi)$ on the basis orthogonal states $\{|\phi_i\rangle_A |\phi_j\rangle_B, i, j = 1, 2, 3, 4\}$ as $\tilde{G}$. We find all the above steps for obtaining the unitary representation of $D(\theta, \xi)$ can be easily performed with classical computer and the procedure is stylized.

Denote $|\alpha_i\rangle = |\phi_i\rangle$, $|\varphi_1\rangle = |\phi_1\rangle$, $|\beta_i\rangle = D^{-1}(\theta, \theta) |\phi_i\rangle_A |\phi_1\rangle_B |P_1\rangle$. So we give the orthogonal basis states as $\{|\phi_i\rangle_A |\phi_1\rangle_B |P_0\rangle\}$, $\{D^{-1}(\theta, \theta) |\phi_i\rangle_A |\phi_1\rangle_B |P_1\rangle\}$, $i = 1, 2, 3, 4$. We introduce two new gates called Control- $D(\theta, \xi)$ and Control- $D^+(\theta, \xi)$, whose function is that we execute $D(\theta, \xi)$ or $D^+(\theta, \xi)$ operates on the two target states when the control qubit on $|1\rangle$, otherwise we do not make influence on the two target states. Then we can transfer the above orthogonal basis vectors into the new orthogonal basis states $\{|\phi_i\rangle_A |\phi_1\rangle_B |P_0\rangle\}$, $\{|\phi_i\rangle_A |\phi_1\rangle_B |P_1\rangle\}$, $i = 1, 2, 3, 4$ with the C- $D(\theta, \theta)$ gate and the inverse with the C- $D^+(\theta, \theta)$ gate, where we take P as the control qubit, and A, B as the target states.

On the new orthogonal basis vectors, with the given maximum clone probability matrix Γ , combine with Eq.(2.4) and Eq.(2.7), U can be obtained through Eq.(2.5), where $\tilde{V}$, E , F are determined by Eq.(2.4). $\tilde{V}$ represent the operate $\hat{V}_A |\phi_1\rangle_{BB} \langle \phi_1| \hat{I}_P$, where the matrix corresponding to the operator $\hat{V}_A$ on the basis states $\{|\phi_i\rangle_A\}$ is V , $\hat{I}_P$ represent unity operator of probe system, $|\phi_1\rangle_{BB} \langle \phi_1|$ means only when B is on $|\phi_1\rangle_B$ we can execute the operator $\hat{V}_A$ on system A . On new orthogonal basis states $\{|\phi_i\rangle_A |P_0\rangle, |\phi_i\rangle_A |P_1\rangle\} \otimes |\phi_1\rangle_B$, $i = 1, 2, 3, 4$,

we express $S = \begin{pmatrix} F & -E \\ E & F \end{pmatrix}$ as $S = \text{diag}(K_1, K_2, K_3, K_4)$, where $K_i = \begin{pmatrix} \sqrt{1-m_i} & -\sqrt{m_i} \\ \sqrt{m_i} & \sqrt{1-m_i} \end{pmatrix}$. So we obtain

$$\hat{S} = \sigma_x^1 \sigma_x^2 \Lambda_2^{AP}(K_1) \sigma_x^2 \sigma_x^1 \cdot \sigma_x^1 \Lambda_2^{AP}(K_2) \sigma_x^1 \cdot \sigma_x^2 \Lambda_2^{AP}(K_3) \sigma_x^2 \cdot \Lambda_2^{AP}(K_4) |\phi_1\rangle_{BB} \langle \phi_1|, \quad (3.11)$$

where $|\phi_1\rangle_{BB} \langle \phi_1|$ means only when B is on $|\phi_1\rangle_B$ we can execute the operator $\hat{S}$ on system A and P . With all the above operator, we realize the probabilistic clone of the states of two particles system. With the concrete form of $D(\theta, \xi)$, $\hat{V}_A$, S and *LEMMA 1*, we can decomposed these operators into the products of some basis operators such as C-NOT and controlled unitary operators. We print the realization with quantum logic gates as here

Figure 3. The networks of probabilistic clone.

C. General Results for Given M Initial Copies

In this part we will give the results in the situation if we have M initial copies and want to identify them or clone N copies. The methods are similar. We first denote the operator which transfer the information of the possible states of the particles system A_{j+1} to those of the particles system A_j by $D_j(\theta, \xi)$. We define $D_M = D_1(\theta, \xi_{M-1}) D_2(\theta, \xi_{M-2}) \dots D_{M-1}(\theta, \theta)$ and $D_N = D_1(\theta, \xi_{N-1}) D_2(\theta, \xi_{N-2}) \dots D_{N-1}(\theta, \theta)$, where $\theta = \xi_1$, to depict the operate which acts as the following:

$$D_M |\psi_i(\theta)\rangle^{\otimes M} |00\rangle^{\otimes(N-M)} = |\psi_i(\xi_M)\rangle_{A_1} |00\rangle^{\otimes(N-1)}, \quad (3.12)$$

$$D_N |\psi_i(\theta)\rangle^{\otimes N} = |\psi_i(\xi_N)\rangle_{A_1} |00\rangle^{\otimes(N-1)}. \quad (3.13)$$

where we have defined the vector ξ_{j+1} respectively by

$$X(\theta, \xi_j) = \tilde{T}^+(\xi_{j+1}) \tilde{T}(\xi_{j+1}). \quad (3.14)$$

As that in Eq.(3.8), we can determine ξ_{j+1} uniquely by above relation.

For general M, N , we still let $|P_i\rangle = |P_1\rangle = |1\rangle$, we still denote $|P_0\rangle = |0\rangle$. For probabilistic identification, with Eq. (3.12), we can give the orthogonal basis states of Eq. (2.1) as $\left\{ \left\{ D_M^{-1} |\phi_i\rangle_{A_1} |00\rangle^{\otimes M-1} |P_0\rangle \right\}, \left\{ |\phi_j\rangle_{A_1} |00\rangle^{\otimes M-1} |P_1\rangle \right\}, i, j = 1, 2, 3, 4 \right\}$. For probabilistic clone, with Eq. (3.13), we give $\left\{ \left\{ D_M^{-1} |\phi_i\rangle_{A_1} |00\rangle^{\otimes N-1} |P_0\rangle \right\}, \left\{ D_N^{-1} |\phi_j\rangle_{A_1} |00\rangle^{\otimes N-1} |P_1\rangle \right\}, i, j = 1, 2, 3, 4 \right\}$.

We introduce two new gates called C- D_N -gate and C- D_N^+ -gate, whose function is that we execute D_N or D_N^+ on the target N states when the control bit on $|1\rangle$, otherwise we make no influence on the target N states. We can transfer the orthogonal basic states above into $\left\{ |\phi_i\rangle_{A_1} |00\rangle^{\otimes M-1} |P_j\rangle, i = 1, 2, 3, 4; j = 0, 1 \right\}$ (for probabilistic identification) and $\left\{ |\phi_i\rangle_{A_1} |00\rangle^{\otimes N-1} |P_j\rangle, i = 1, 2, 3, 4; j = 0, 1 \right\}$ (for probabilistic clone) with the C- D_M gate, C- D_N gate and σ_x^P gate (the inverse with C- D_M^+ gate, C- D_N^+ gate and σ_x^P gate). On this orthogonal basis states, we yield

$$\begin{cases} \tilde{V} = V_{A_1} |00\rangle^{\otimes(M-1)} \otimes (M-1) \langle 00| I_P, & \text{for identification} \\ \tilde{V} = V_{A_1} |00\rangle^{\otimes(N-1)} \otimes (N-1) \langle 00| I_P, & \text{for clone} \end{cases} \quad (3.15)$$

where V_{A_1} is a unitary operator on system A_1 and its realization has been resolved by LEMMA 1. It is obvious that $\tilde{V}$ is a controlled unitary operator.

In the similar way, denote $\hat{S}_{A_1 P} = \sigma_x^1 \sigma_x^2 \Lambda_2^{A_1 P}(K_1) \sigma_x^2 \sigma_x^1 \cdot \sigma_x^1 \Lambda_2^{A_1 P}(K_2) \sigma_x^1 \cdot \sigma_x^2 \Lambda_2^{A_1 P}(K_3) \sigma_x^2 \cdot \Lambda_2^{A_1 P}(K_4)$, where $K_i = \begin{pmatrix} \sqrt{1-m_i} & -\sqrt{m_i} \\ \sqrt{m_i} & \sqrt{1-m_i} \end{pmatrix}$, we can express S as

$$\begin{cases} \hat{S} = \hat{S}_{A_1 P} |00\rangle^{\otimes(M-1)} \otimes (M-1) \langle 00|, & \text{for identification} \\ \hat{S} = \hat{S}_{A_1 P} |00\rangle^{\otimes(N-1)} \otimes (N-1) \langle 00|, & \text{for clone} \end{cases} \quad (3.16)$$

In the discussion above, we don't set any other limitation of probability matrix Γ except the determining Inequality (2.3) and (2.8). When the probability changes, the main frame of the networks of probabilistic identification and clone

remains the same but the rotation $\tilde{V}$ and $\Lambda_2^{A_1P}(K_i)$ have different forms. The stability of the clone is another virtue of the networks like that in [22]. We can also prove the capacity of error adaptation of our net. We take the example in FIG.2 and suppose to introduce an error in auxiliary system B . The input state in B comes to

$$|\phi\rangle_B = e^{i\tau_1} \sqrt{1 - \sum_{i=1}^3 |\delta_i^2|} |\phi_1\rangle_B + \sum_{i=1}^3 \delta_i e^{i\tau_{i+1}} |\phi_{i+1}\rangle_B, \quad (3.17)$$

where δ_i is a variable whose value is close to 0.

Like that in [22], we measure output port P . If we get $|0\rangle_P$, in general it is regarded as a failure. But if we measure output following $C-D^+$ gate of system B and get $|\phi_{i+1}\rangle_B$ which comes from the error δ_i of $|\phi\rangle_B$, it is obvious that the input state won't be destroyed and can be reset as another input of cloning machine. To the general situation, when N is relatively large the error happens in the $N - M$ ports of B with great probability. If any of the ports comes to this situation, we can detect it and can avoid incorrect clones and identification.

D. Realization for n -particles System

In the last part of this section we will discuss the realizing probabilistic cloning and identifying the states of n -particles system. For n -particles system, there exist 2^n linear independent states, which can be also represented like $|\tilde{\psi}_i\rangle$ by a unitary evolution similar to that in LEMMA 2. We can also define the similar operator $D(\theta, \xi)$ and D_M, D_N that transfer the information of N copies into one states of n -particles system, where $\theta = (\theta_i^j, \mu_i^j, i = 2, \dots, 2^n; j = 1, 2, \dots, i-1)$. With LEMMA 1 we can realize $D(\theta, \xi)$ with universal logic gates. With $D(\theta, \xi)$ operator we can transfer the basis states into the controlled unitary evolution of A_1P system. We still have

$$U = \tilde{V} \begin{pmatrix} F & -E \\ E & F \end{pmatrix} \tilde{V}^+. \quad (3.18)$$

where $\tilde{V}$ is $\{A_i, i = 2, 3, \dots, n\}$ control A_1 unitary operator. We can also express S like Eq.(3.16) with $\sigma_x^{(i)}$ and $\Lambda_n^{A_1 P}(K_j)$ and the controlment of $\{A_i, i = 2, 3, \dots, n\}$, where $\sigma_x^{(i)}$ represent σ_x operator on the i -th particle of A_1 system. With all the above operator, we can realize probabilistic cloning and identifying the states of n -particles system given M initial copies of each state.

IV. CONCLUSION

We have realize the probabilistic cloning and identifying linear independent quantum states of multi-particles system, given prior probability, with universal logic gates using the method of unitary representation, which we have develope in [22]. In this paper, we don't restrict the states of multi-particles system are separate or entanglement. So our result is universal for both of them. We still assume the state of each particle is in 2-level, which means the state can be expressed with $|0\rangle$ and $|1\rangle$, and the question of how to realize the probabilistic identifying and cloning the system with n -states of each particle is still interesting.

ACKNOWLEDGMENT

This work was supported by the National Nature Science Foundation of China.

-
- [1] C. H. Bennett, *Phys. Today* **48** 24 (1995).
- [2] W. K. Wootters and W. H. Zurek, *Nature* **299** 802 (1982).
- [3] D. Dieks, *Phys. Lett.* **92A** 271 (1982).
- [4] H. P. Huen, *Phys. Lett. A.* **113** 405 (1986).
- [5] G. M. D'Ariano, H. P. Huen, *Phys. Rev. Lett.* **76** 2832 (1996).
- [6] H. Barnum, G. M. Caves, C. A. Fuchs, R. Jozsa, B. Schumacher, *Phys. Rev. Lett.* **76** 2818 (1996).
- [7] M. Koashi, N. Imoto, *Phys. Rev. Lett.* **81** 4264 (1998).
- [8] D. Dieks, *Phys. Lett. A.* **126** 303 (1987).
- [9] V. Bužek and M. Hillery, *Phys. Rev. A* **54** 1844 (1996).
- [10] N. Gisin and S. Massar, *Phys. Rev. Lett.* **79** 2153 (1997).
- [11] D. Bruß, A. K. Ekert and C. Maccchiavello. *Phys. Rev. Lett.* **81** 2598 (1998).
- [12] R. F. Werner. *Phys. Rev. A* **58** 1827 (1998).
- [13] M. Keyl and R. F. Werner. *LANL Report quant-ph/9807010*.
- [14] M. Hillery and V. Bužek. *Phys. Rev. A* **56** 1212 (1997).
- [15] D. Bruß, D. P. DiVincenzo, A. K. Ekert, C. A. Fuchs, C. Maccchiavello and J. Smolin. *Phys. Rev. A* **57** 2368 (1998).
- [16] A. Chefles and S. M. Barnett. *J. Mod. Opt.* **45** 1295 (1998).
- [17] L-M. Duan and G-C. Guo. *Phys. Lett. A* **243** 261 (1998).

- [18] L-M. Duan and G-C. Guo. *Phys. Rev. Lett.* **80** 4999 (1998).
- [19] A. Chefles and S. M. Barnett. *LANL Report qunt-ph/9808018*.
- [20] A. Chefles and S. M. Barnett. *LANL Report qunt-ph/9812035*.
- [21] C-W. Zhang, C-F. Li and G-C. Guo, *LANL Report qunt-ph/9908001*.
- [22] C-W. Zhang, Z-Y. Wang, C-F. Li and G-C. Guo, *LANL Report quant-ph/9907097*.
- [23] D. Deutsch, *Proc. R. Soc. London Ser. A* **400** 97 (1985), **425** 73 (1989).
- [24] A. Barenco, C. H. Bennett, R. Cleve, D. P. DiVincenzo, N. Margolus, P. Shor, T. Sleator, J. A. Smolin and H. Weinfurter. *Phys. Rev. A* **52** 3457 (1995).

Figure captions:

FIG. 1. First we measure the output port P . If we get $|0\rangle_P$, the identification is successful. Then we measure output port 1 and 2. If it is $|\phi_i\rangle_{1,2}$, we identify that the input state is $|\psi_i\rangle_{1,2}$, whose probability is γ_i . If we get $|1\rangle_P$, the identification fails.

FIG. 2. Where $\hat{S} = \sigma_x^1 \sigma_x^2 \Lambda_2^{AP}(K_1) \sigma_x^2 \sigma_x^1 \cdot \sigma_x^1 \Lambda_2^{AP}(K_2) \sigma_x^1 \cdot \sigma_x^2 \Lambda_2^{AP}(K_3) \sigma_x^2 \cdot \Lambda_2^{AP}(K_3)$.

FIG. 3. This quantum networks with logic gates contain a Control- $D(\theta, \theta)$ -gate, a Control- $D^+(\theta, \theta)$ -gate and a Control- S -gate. We have illustrated S gates in FIG. 2. With the concrete form of $D(\theta, \theta)$, $D^+(\theta, \theta)$ and *LEMMA 1* we can also express $D(\theta, \theta)$ and $D^+(\theta, \theta)$ with quantum logic gates. Here we omit it for it is so complicated and should be finished by computer. First we measure output port P . If we get $|1\rangle_P$, the clone is successful. Then two copies of the input state in input port system A are gained in output port A and B . Else if we get $|0\rangle_P$, the clone fails and we discard the output.

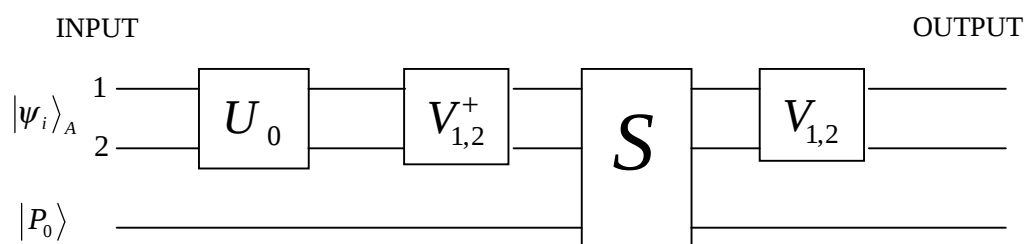


Fig. 1 Zhang

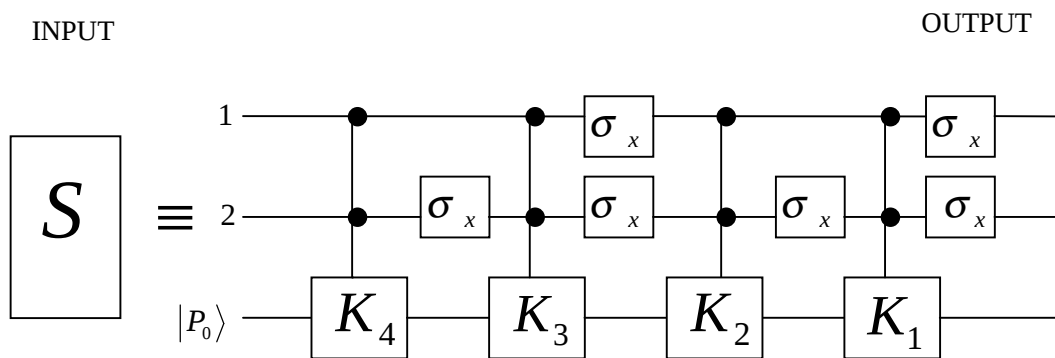


Fig. 2 Zhang

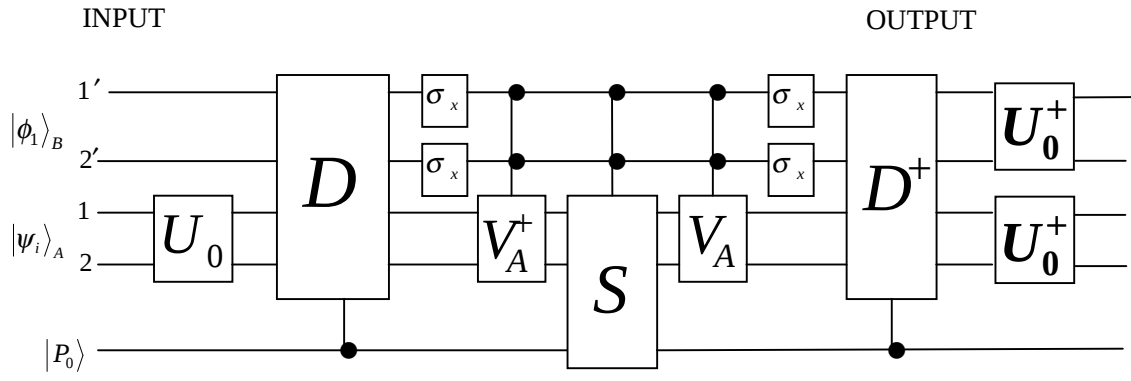


Fig. 3 Zhang